



Cloud-Free Smart Lighting with Secure Local Control
2.4GHZ RF* NO GATEWAY REQUIRED

Integrate 2.4GHz Wireless Lighting Control System


Factory-direct LED fixtures with built-in wireless dimming, tunable white, group control and scene memory.

- ✓ No extra control wiring
- ✓ 86 wall box knob panel
- ✓ Brightness + CCT control
- ✓ Group and scene memory
- ✓ For hotels, homes and commercial projects




2.4GHz CCT Knob Dimmer Panel




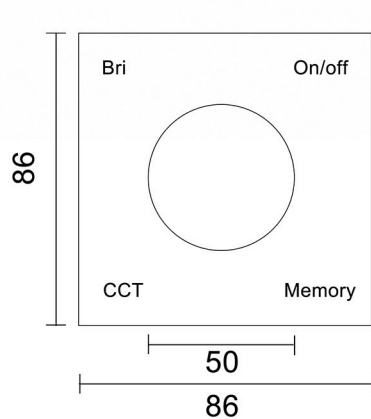

Front View




Side Cross-Section

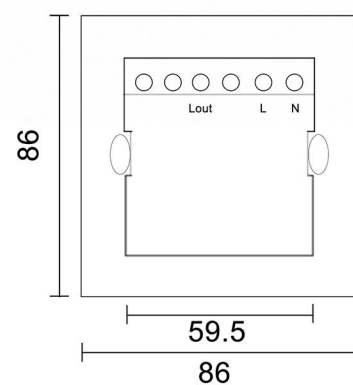

Back View

Installation :

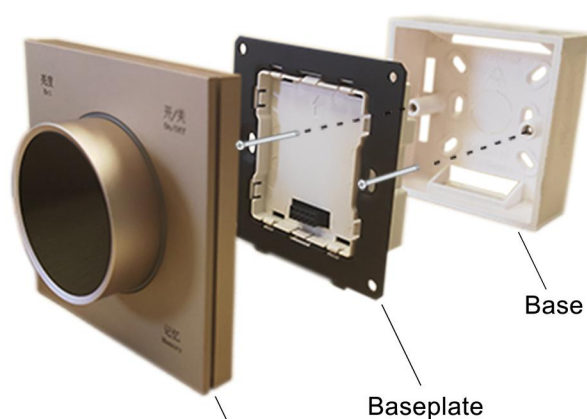

2.4GHz CCT Knob Dimmer Panel

Magnetic lights




Movie Mode Conversation Mode Relax Mode



Scene	Brightness	CCT
Movie Mode	20%	2700K
Conversation Mode	70%	3500K
Relax Mode	40%	2700K

48V



20# series

Magnetic track Recessed


The track light is hidden in the ceiling, which is both beautiful and practical, making your home instantly more upscale and keeping the space neat and beautiful.


Advanced magnetic technology makes installation and removal more convenient, and the light position can be adjusted at will to meet the needs of different scenes.

The folding function increases the flexibility of the lamp, and the angle and direction can be adjusted according to different lighting needs to achieve multi-angle lighting.

It is widely used in various indoor spaces, such as libraries, museums, commercial space, home lighting, etc.

”

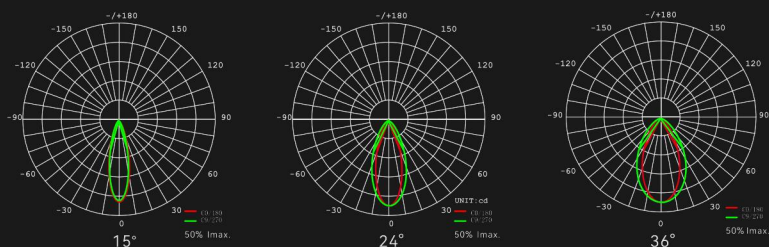

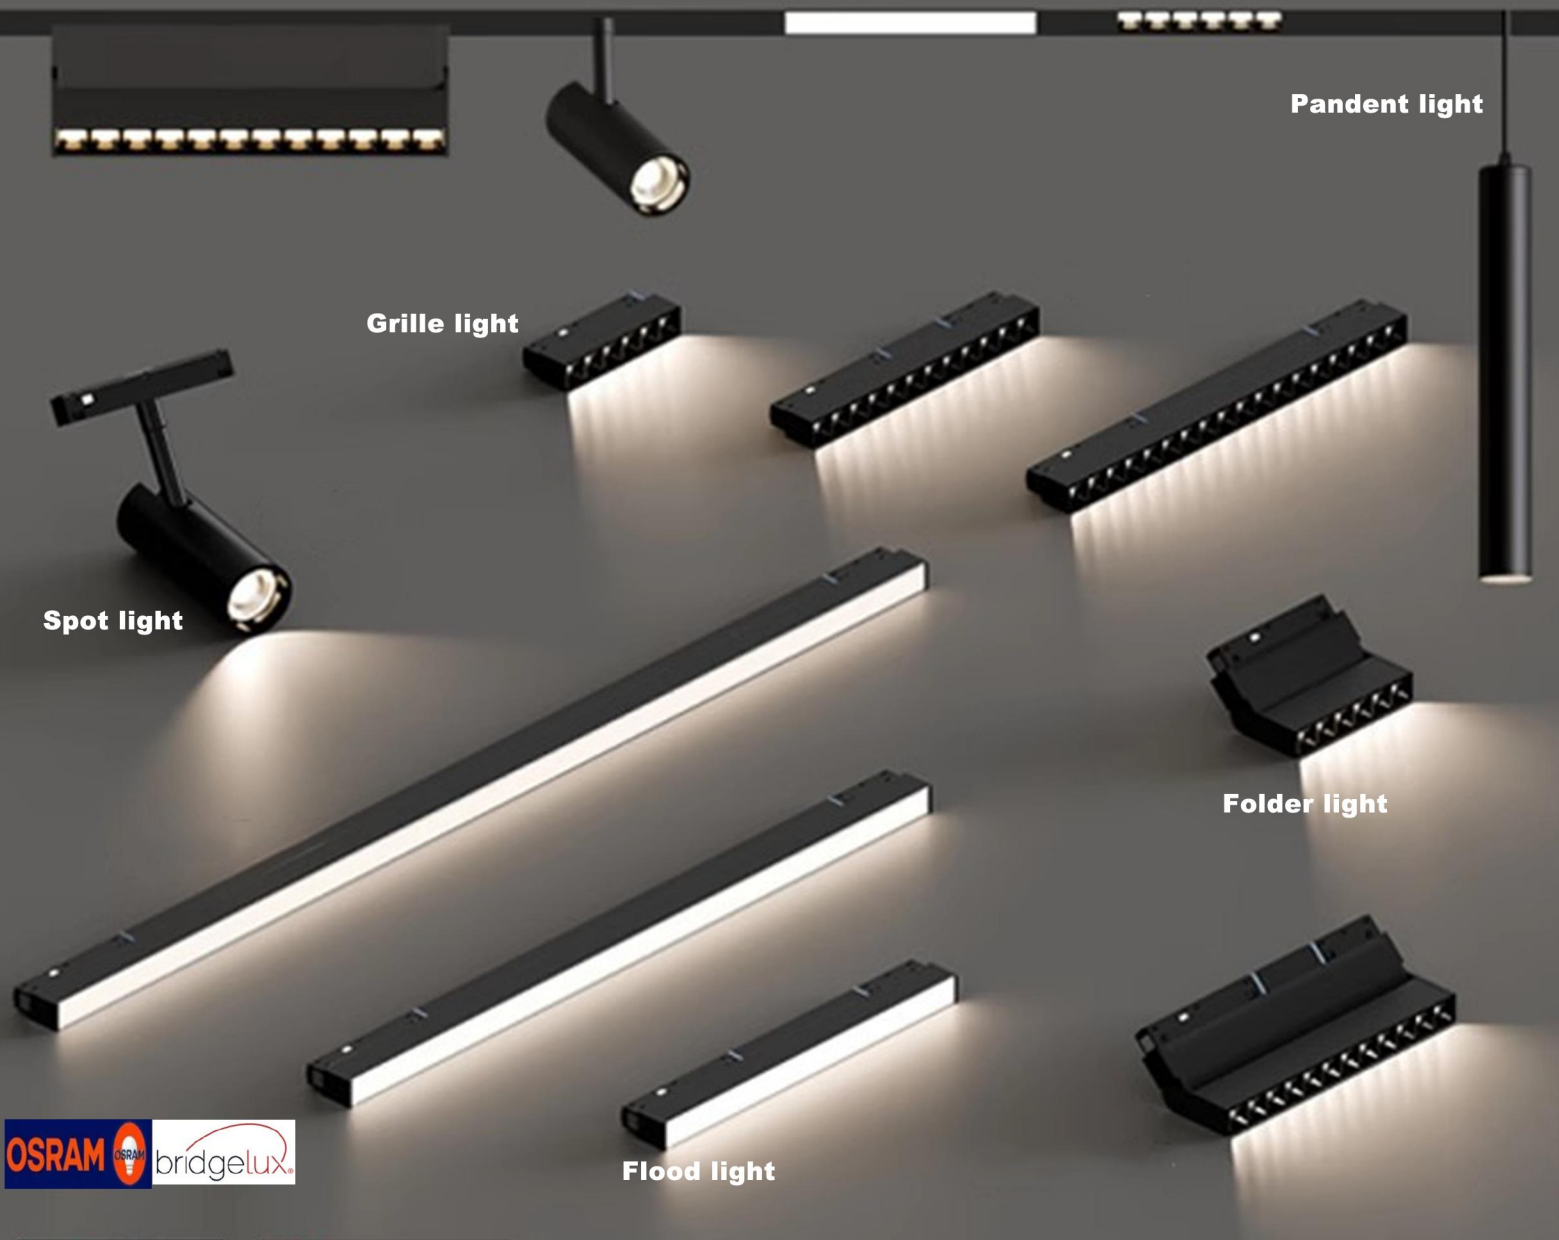

Parameters

Product	Model	Power	Product Size(mm)	Voltage	CCT	Beam Angle	Installation Method
Flood light	FGD-20-300	10W	L300*W22*H25	DC48V	2700-6500K	120°	Surface Mouted
Flood light	FGD-20-450	15W	L450*W22*H25	DC48V	2700-6500K	120°	Surface Mouted
Flood light	FGD-20-600	20W	L600*W22*H25mm	DC48V	2700-6500K	120°	Surface Mouted
Flood light	FGD-20-900	30W	L900*W22*H25mm	DC48V	2700-6500K	120°	Surface Mouted
Flood light	FGD-20-1200	40W	L1200*W22*H25mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Grille light	GSD-20-6	6W	L112*W22*H25mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Grille light	GSD-20-12	12W	L220*W22*H25mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Grille light	GSD-20-18	18W	L330*W22*H25mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Grille light	GSD-20-24	24W	L440*W22*H25mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Folder light	ZD-20-6a	6W	L115*W22*H100mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Folder light	ZD-20-12a	12W	L225*W22*H100mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Folder light	ZD-20-18a	18W	L330*W22*H101mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Folder light	ZD-20-24a	24W	L460*W22*H100mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Spot light	GDD-HJ6W	7W	φ35*L80mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Spot light	GDD-HJ10W	10W	φ45*L100mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Spot light	GDD-HJ15W	15W	φ55*L115mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Spot light	GDD-HJ20W	20W	φ65*L135mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Pendant light	DXD-20-6	6W	φ30*L300mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Pendant light	DXD-20-10	10W	φ40*L300mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted
Pendant light	DXD-20-12	12W	φ55*L300mm	DC48V	2700-6500K	15°/24°/36°	Surface Mouted

Down lights



Relax Mode

Family Mode

Reading/Working/
cleaning



Scene	Brightness	CCT
Relax Mode	30%	3000K
Family Mode	80%	4000K
Reading/Working/ Cleaning	100%	6500K

Down lights



Parameters

Model	Power	Product Size	Cut-hole	CCT	Beam Angle
DF-75-7	7W	Φ85*75	75mm	2700-6500K	15°/24°/36°
DF-75-9	9W	Φ85*97	75mm	2700-6500K	15°/24°/36°
DF-75-12	12W	Φ85*97	75mm	2700-6500K	15°/24°/36°
YD-75-9	9W	Φ85*83	75mm	2700-6500K	15°/24°/36°
HM-75-7	7W	Φ85*60	75mm	2700-6500K	15°/24°/36°
LD-75-7	7W	Φ85*60	75mm	2700-6500K	15°/24°/36°
LS-75-6	6W	Φ90*85	75mm	2700-6500K	15°/24°/36°
LS-95-12	12W	Φ105*105	95mm	2700-6500K	15°/24°/36°
LS-120-25	25W	Φ130*130	120mm	2700-6500K	15°/24°/36°
XB-75-7	6W	Φ90*60	75mm	2700-6500K	15°/24°/36°
XB-95-12	12W	Φ110*75	95mm	2700-6500K	15°/24°/36°
XB-115-20	20W	Φ130*75	115mm	2700-6500K	15°/24°/36°